

High Performance Computing - Programming Paradigms and Scalability

Exercise Sheet 7: Repetition

1 Network Topologies

The following image shows the first levels of a recursive network topology – a pyramid network. Each node has exactly four child-nodes, all child-nodes are connected through a 2-dimensional grid on the next level.

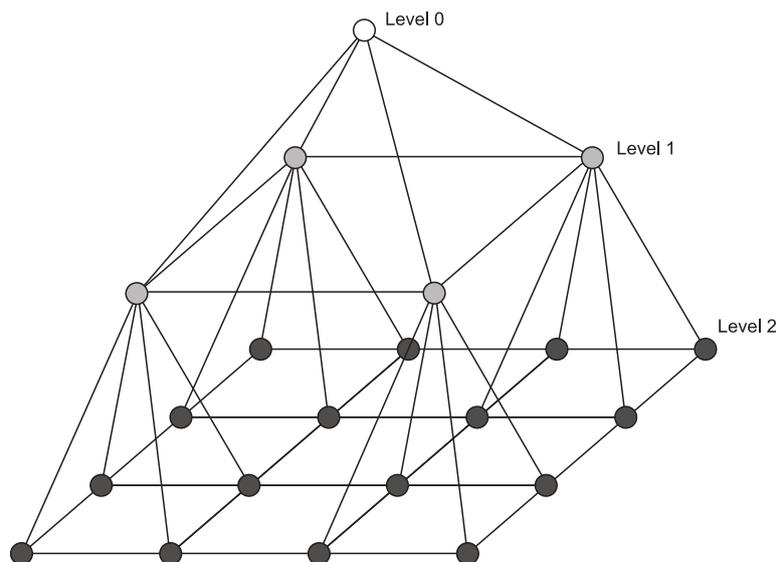


Figure 1: Example of a pyramid-network of height $H = 2$ and a total of $N = 21$.

- Give a general formula, depending only on the height H , to compute the total number of nodes N in the Network. Sums should – if possible – be resolved.
- Compute
 - cost (meaning the number of edges)
 - diameter
 - bisection width

of a general pyramid-network depending on N and H only.

2 Semaphores

A railway track between two cities contains a bridge over a canyon that can be accessed by a single train at any point in time only. Hence, this bridge is an exclusively usable resource and needs to be implemented as a critical section.

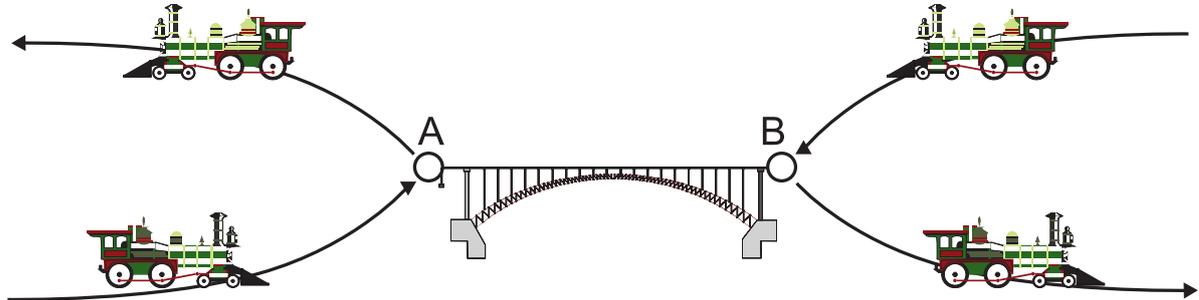


Figure 2: Visualisation of *L-* and *R-trains* and the exclusively usable bridge.

There exist two types of trains: *R-trains* that always drive from the left-hand to the right-hand side and *L-trains* that always drive from the right-hand to the left-hand side. Give a correct synchronisation (pseudo code) using as many semaphores as necessary, thus, no two trains can access the bridge at the same time **and** *R-trains* and *L-trains* access the bridge alternately, i.e. after an *R-train* always follows an *L-train* and vice versa. Also give a correct initialisation of all your semaphores!

3 OpenMP

On some quadratic meadow the grass needs to be cut. Thus, several people – each equipped with a mowing machine – have to organise themselves in order to do this work in parallel. Consider the meadow as a 2-dimensional array A of size $N \times N$ and some function `mow()` to be executed for each element a_{ij} of A . Write a parallel program using OpenMP and think about sufficient synchronisation!